

Headlights




NCC® 5.75" Bi-LED Headlight

New 5.75" LED headlight with LED low beam and high beam, LED daytime running light and position light in light guide technology. H4 connector for LED low beam and high beam. Available in chrome, black-chrome and black-matt. Versions for left-hand and right-hand drive available.



- 30.00 h lifetime for LED and electronic components
- White illumination of the road, similar to xenon
- H4 connector for Plug & Play
- Standard 5.75" fixing (PAR56)
- Aluminium-die casting housing
- 480 h salt spray test compliant
- Available in chrome, black-chrome or black-matt
- Homologation for ECE (also SAE 2139 compliant)

Technical data			
Type	M317		
Dimensions	143x107	mm	
LEDs and type	3	Osram	
Voltage	12 and 24	V	
Power @ 12V	Low beam: 22 W High beam: 23 W Daytime running light: 8.6 W Position light: 1.2 W		
Weight	740	g	
Homologation	ECE R7, R10, R87, R112, SAE		
Ventilation	Membrane		
Material housing	ADC		
Material outer lens	PC, hardened		
Specification	On request		
Temperature	-40°C - +80°C		
Cable and length	0,75	mm ²	FLRY, l= 200 mm
Connector	H4 for headlight, Tyco/AMP Superseal for daytime running and position light		
Description	Article number		
5.75" Bi-LED headlight, chrome	5Z-AFTP-C (RHD: 5Z-AFTP-C-RHD)		
5.75" Bi-LED headlight, black-chrome	5Z-AFTP-SC (RHD: 5Z-AFTP-SC-RHD)		
5.75" Bi-LED headlight, black-matt	5Z-AFTP-SM (RHD: 5Z-AFTP-SM-RHD)		

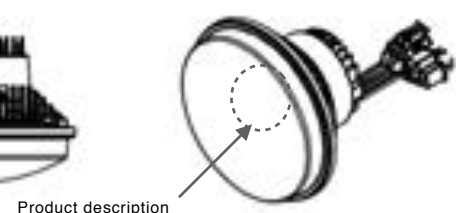

Errors and omissions excepted. Date 08-2018